


SPECTRA 4 SWITCH SETTINGS

SWITCH SETTINGS

Before installing the dome drive, configure the receiver address, termination, and baud setting. The DIP switches used to configure these settings are located on the base of the dome drive.

Figure shows the default settings for the DIP switches. Switch SW1-1 (SW1, switch 1) is set to the ON position. All other switches are set to the OFF position.

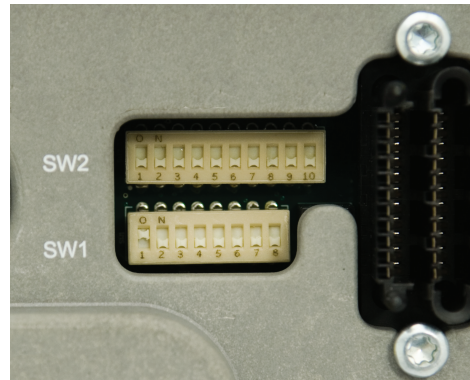

SW1 – RECEIVER ADDRESS

Set the SW1 switches for the address of the dome drive. The following information is required to set the dome drive address:

P-Type Control	Default address is 2. Refer to Table A for address settings that use P-type control. Maximum number of receivers is 32.
D-Type Control	Default address is 1. Refer to Table B for address settings that use D-type control. Maximum number of receivers is 254.



World Headquarters
625 W. Alluvial Avenue
Fresno, CA 93711
USA & Canada Tel: 866/587-2503 Fax: 800/289-9150
International Tel: 1-559/348-5504 Fax: 1-559/348-1120
www.pelco.com

Pelco and the Pelco logo are registered trademarks of Pelco.
Information subject to change without notification.
© Copyright 2006, Pelco. All rights reserved.