



by **Schneider** Electric

INSTALLATION/OPERATION

VS5100 Series Sequential Switcher



C831M-G (8/12)

Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the points where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
13. Apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases shall be placed on the apparatus.
14. **WARNING:** To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
15. Installation should be done only by qualified personnel and conform to all local codes.
16. Unless the unit is specifically marked as a NEMA Type 3, 3R, 3S, 4, 4X, 6, or 6P enclosure, it is designed for indoor use only and it must not be installed where exposed to rain and moisture.
17. Only use replacement parts recommended by Pelco.
18. After replacement/repair of this unit's electrical components, conduct a resistance measurement between the line and exposed parts to verify the exposed parts have not been connected to the line circuitry.

The product and/or manual may bear the following marks:



This symbol indicates that dangerous voltage constituting a risk of electric shock is present within this unit.



This symbol indicates that there are important operating and maintenance instructions in the literature accompanying this unit.

CAUTION:
RISK OF ELECTRIC SHOCK. DO NOT OPEN.

Description

The VS5100 Series sequential switchers are designed to switch four cameras (VS5104) or eight cameras (VS5108) to one monitor.

MODELS

VS5104	Desktop, 4-position, single output sequential switcher without alarm inputs
VS5108	Desktop, 8-position, single output sequential switcher without alarm inputs

Installation

The VS5104/VS5108 switcher is designed for either looping or terminating operation. The unit is shipped ready for terminating operation, but it can be modified for looping operation. Looping and terminating inputs may be mixed.

1. To install the VS5104/VS5108, do the following:
 - a. **Terminating operation:** Proceed to step 2.
 - b. **Looping operation:** To convert to looping operation, remove the cover. Locate the 75-ohm resistors at the rear of the BNC jacks. Use wire cutters to clip one of the resistor leads for each input that you want to loop. Refer to Figure 1. Replace the cover.

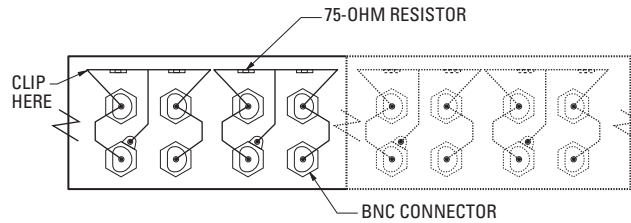


Figure 1. Rear Panel Internal View

2. Connect all equipment for your system to the connectors located on the back of the unit. Refer to Figure 2.
3. Connect the AC adapter to the 12 VAC input socket on the switcher. Connect the transformer to a 120 power supply.
4. Set all channel switches to the AUTO (center). If a video input is not connected, set the corresponding channel switch to the BYPASS (down) position.
5. Adjust the DWELL interval control with a screwdriver to the desired switching interval, 1 to 70 seconds nominal. Rotate the control clockwise for longer intervals and counter-clockwise for shorter intervals. This control is a 15-turn precision potentiometer. The approximate ratio is one full turn per 4 to 5 seconds of delay.

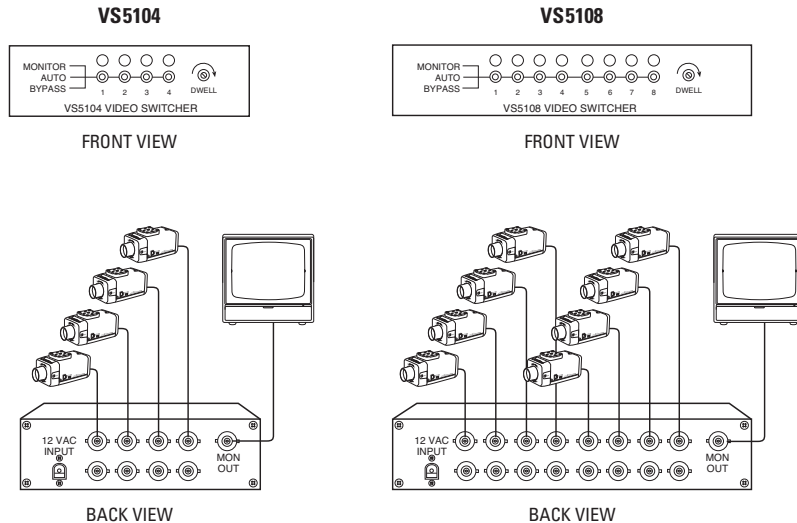


Figure 2. VS5104/VS5108 System Configuration

Operation

Automatic sequence viewing: To automatically sequence all the cameras through the monitor, set all channel switches to the AUTO (center) position.

Bypass operation: To bypass a camera in the automatic sequence, set the camera's channel switch to the BYPASS (down) position.

Single camera viewing: To continuously view from a single camera, set the channel switch for the camera to the MONITOR (up) position.

MAINTENANCE

Under normal operating conditions and usage, maintenance of this equipment is not necessary. The VS5104/VS5108 has no operator serviceable components and should be serviced by a trained technician or returned to the factory for repair.

Specifications

VIDEO

Inputs	Terminating (75 ohms) or looping
Output	75 ohms
Gain	Unity
Dwell	Adjustable from 1 to 70 seconds nominal
Frequency Response	Flat within ± 1 dB to 10 MHz
Maximum Signal Level	2 Vp-p
Tilt	Less than 2%
Crosstalk	Better than -40 dB at 5.5 MHz

ELECTRICAL

Input Voltage	120 VAC, 50/60 Hz to dedicated wall transformer
Power Requirements for Transformer	1.5 VA (0.125 A) at 12 volts RMS $\pm 15\%$, 50/60 Hz from a dedicated isolated power source. (Wall transformer provided with unit.) These units are also capable of operating on 12 VDC for use in mobile applications.

GENERAL

Construction	
Chassis	Steel, zinc plated
Cover	Steel, black polyester powder coat
Panel	Aluminum, black polyester powder coat, white silkscreen
Environment	0° to 49°C (32° to 120°F)
Dimensions	
VS5104	22.38 x 14.00 x 4.50 cm (8.81" D x 5.51" W x 1.77" H)
VS5108	23.50 x 21.87 x 4.50 cm (9.25" D x 8.61" W x 1.77" H)
Weight	
VS5104	1.15 kg (2.53 lb)
VS5108	1.73 kg (3.82 lb)
Ratings	Meets NEMA Type 1 standards

PRODUCT WARRANTY AND RETURN INFORMATION

WARRANTY

Pelco will repair or replace, without charge, any merchandise proved defective in material or workmanship **for a period of one year** after the date of shipment.

Exceptions to this warranty are as noted below:

- Five years:
 - Fiber optic products
 - Unshielded Twisted Pair (UTP) transmission products
 - CC3701H-2, CC3701H-2X, CC3751H-2, CC3651H-2X, MC3651H-2, and MC3651H-2X camera models
- Three years:
 - FD Series and BU Series analog camera models
 - Fixed network cameras and network dome cameras with Sarix® technology
 - Sarix thermal imaging products (TI and ESTI Series)
 - Fixed analog camera models (C20 Series, CCC1390H Series, C10DN Series, and C10CH Series)
 - EH1500 Series enclosures
 - Spectra® IV products (including Spectra IV IP)
 - Spectra HD dome products
 - Camclosure® IS Series integrated camera systems
 - DX Series video recorders (except DX9000 Series which is covered for a period of one year), DVR5100 Series digital video recorders, Digital Sentry® Series hardware products, DVX Series digital video recorders, and NVR300 Series network video recorders
 - Endura® Series distributed network-based video products
 - Genex® Series products (multiplexers, server, and keyboard)
 - PMCL200/300/400 Series LCD monitors
 - PMCL5xxF Series and PMCL5xxNB Series LCD monitors
- Two years:
 - Standard varifocal, fixed focal, and motorized zoom lenses
 - DF5/DF8 Series fixed dome products
 - Legacy® Series integrated positioning systems
 - Spectra III™, Spectra Mini, Spectra Mini IP, Esprit®, ExSite®, ExSite IP, and PS20 scanners, including when used in continuous motion applications
 - Esprit Ti and TI2500 Series thermal imaging products
 - Esprit and WW5700 Series window wiper (excluding wiper blades)
 - CM6700/CM6800/CM9700 Series matrix
 - Digital Light Processing (DLP®) displays (except lamp and color wheel). The lamp and color wheel will be covered for a period of 90 days. The air filter is not covered under warranty.

- Six months:
 - All pan and tilts, scanners, or preset lenses used in continuous motion applications (preset scan, tour, and auto scan modes)

Pelco will warrant all replacement parts and repairs for 90 days from the date of Pelco shipment. All goods requiring warranty repair shall be sent freight prepaid to a Pelco designated location. Repairs made necessary by reason of misuse, alteration, normal wear, or accident are not covered under this warranty.

Pelco assumes no risk and shall be subject to no liability for damages or loss resulting from the specific use or application made of the Products. Pelco's liability for any claim, whether based on breach of contract, negligence, infringement of any rights of any party or product liability, relating to the Products shall not exceed the price paid by the Dealer to Pelco for such Products. In no event will Pelco be liable for any special, incidental, or consequential damages (including loss of use, loss of profit, and claims of third parties) however caused, whether by the negligence of Pelco or otherwise.

The above warranty provides the Dealer with specific legal rights. The Dealer may also have additional rights, which are subject to variation from state to state.

If a warranty repair is required, the Dealer must contact Pelco at (800) 289-9100 or (559) 292-1981 to obtain a Repair Authorization number (RA), and provide the following information:

1. Model and serial number
2. Date of shipment, P.O. number, sales order number, or Pelco invoice number
3. Details of the defect or problem

If there is a dispute regarding the warranty of a product that does not fall under the warranty conditions stated above, please include a written explanation with the product when returned.

Method of return shipment shall be the same or equal to the method by which the item was received by Pelco.

RETURNS

To expedite parts returned for repair or credit, please call Pelco at (800) 289-9100 or (559) 292-1981 to obtain an authorization number (CA number if returned for credit, and RA number if returned for repair) and designated return location.

All merchandise returned for credit may be subject to a 20 percent restocking and refurbishing charge.

Goods returned for repair or credit should be clearly identified with the assigned CA or RA number and freight should be prepaid.

Revised 1-12-12

 The materials used in the manufacture of this document and its components are compliant to the requirements of Directive 2002/95/EC.



This equipment contains electrical or electronic components that must be recycled properly to comply with Directive 2002/96/EC of the European Union regarding the disposal of waste electrical and electronic equipment (WEEE). Contact your local dealer for procedures for recycling this equipment.

REVISION HISTORY

Manual #	Date	Comments
C831M-E	11/99	Updated manual to new format. Combined C831M-D (VS5104) and C832M-D (VS5108) into one manual.
C831M-F	10/04	Updated manual to new format. Revised Important Safety Instructions.
C831M-G	8/12	All references to obsolete models VS5104/220 and VS5108/220 were removed from manual. Updated manual to new format and revised warranty.